

SKF Lubrication


Universal Kit for Mono Excavators

Many years of experience with lubricating construction equipment have now been united in a 'one kit fits all' automatic lubrication solution for excavators.

The 'Universal Kit for Mono Excavators' is designed to fit most tracked mono excavators ranging from 20 to 30 tons.

The Universal Kit can be used on machines which do not have a specially designed lubrication system. The kit, designed for hard greases class 2, comes with everything needed: Pump unit with timer, hoses, fittings and distributors with special devices to unite unused outlets.

Tailor made kits for leading excavator manufactures are mentioned in leaflet 1-0358-EN.

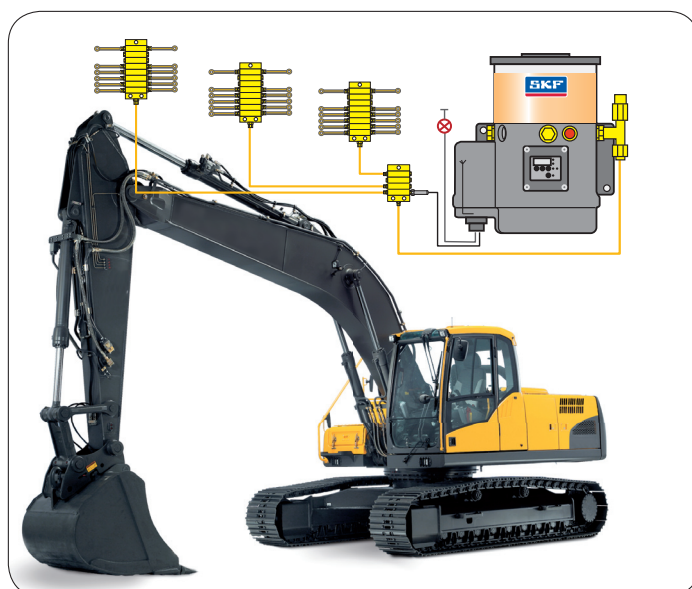

Universal Kit				
Order Number	Pump Size		Monitoring	
	2 kg	6 kg	Low Level	Cycle Switch
136-1185.51+924	X			
136-1257.51+924	X		X	
136-1259.51+924	X			X
136-1261.51+924	X		X	X
136-1256.51+924		X		
136-1258.51+924		X	X	
136-1260.51+924		X		X
136-1262.51+924		X	X	X

The installation is described in leaflet No. **951-150-014-EN**



Order number: 1-0357-EN

Subject to change without notice. 05/2009

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication. But no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of use of the information contained herein.

All SKF products may only be used as intended. Should operating instructions be supplied together with the products, the device-specific instructions and specifications therein contained are also to be followed. In particular, we call your attention to the fact that hazardous materials of any kind, especially the materials classified as hazardous by EC Directive 67/548/EEC, Article 2, Par. 2, may only be filled into SKF centralized lubrication systems and components and delivered and/or distributed with the same after consultation with and written approval from SKF Lubrication Systems AG. No products manufactured by SKF are approved for use in conjunction with gases, liquefied gases, pressurized gases in solution and fluids with a vapor pressure exceeding normal atmospheric pressure (1013 mbar) by more than 0.5 bar at their maximum permissible temperature.

Brochure note

1-9430-EN	Progressive systems for commercial vehicles
1-3035-EN	Reservoir pump units of the KFG series for use in vehicles
1-3015-EN	Progressive sectional feeder VPK
1-3016-EN	Progressive sectional feeder VP
1-3017-EN	Progressive block feeder VPB
1-0103-1-EN	Connection systems

Competence Center for Vehicle Lubrication

SKF Lubrication Systems AG

2. Industriestrasse 4 • 68766 Hockenheim • Germany

Tel. +49 (0)62 05 27-0 • Fax +49 (0)62 05 27-101

www.skf.com/lubrication

This brochure was presented to you by:

